

FRESH PLUS 4P

Ref: 1



Ref: 2

Temperature range/Range di temperatura +2/+7° C

Doors, drawers/porte, cassetti 4

Ventilated refrigerated counter on feet, 700 mm of depth made of precovered STEEL-PET steel, 2, 3 or 4 doors with 1 plastic coated shelf 400x600 on C s/s pairs of runners or 3 pairs of s/s L runners per door. Built in unit. S/s AISI 304 straight or with splashback worktop, or without worktop. Digital controller. Automatic systems for defrosting and evaporation of the condensation water. Made of precovered STEEL-PET steel, 2, 3 or 4 doors with 1 plastic coated shelf 400x600 on C s/s pairs of runners or 3 pairs of s/s L runners per door. Built in unit. S/s AISI 304 straight or with splashback worktop, or without worktop. Digital controller. Automatic systems for defrosting and evaporation of the condensation water.

Tavoli refrigerati ventilati su piedi, profondità 700 mm in acciaio prerivestito STEEL-PET, 2, 3 o 4 vani con 1 griglia plastificata 400x600 su guide a C o 3 coppie guide inox L per porta. Gruppo incorporato. Piano in acciaio inox AISI 304 dritto, con alzatina o senza piano. Controller digitale. Sbrinamento ed evaporazione dell'acqua di condensa automatici.

Made of precovered STEEL-PET steel, 2, 3 or 4 doors with 1 plastic coated shelf 400x600 on C s/s pairs of runners or 3 pairs of s/s L runners per door. Built in unit. S/s AISI 304 straight or with splashback worktop, or without worktop. Digital controller. Automatic systems for defrosting and evaporation of the condensation water.

Maximum Shelves N°/ Max Ripiani N°: 36 GN1/1 H40mm - EN600x400 H40mm

Maximum Pans N°/ Max Vaschette N°:

All specifications are subject to change without notice. *Dati tecnici soggetti a modifiche senza preavviso.*

The Picture (Ref: 1), the description (Ref: 2) and the technical drawing (Ref: 5) refer to the product range. Dimensional Data (Ref: 3) and Technical Data (Ref: 4) refer to the specific code (Ref: 6).

L'immagine (Ref: 1), la descrizione (Ref: 2) e il disegno tecnico (Ref: 5) sono relativi alla famiglia prodotto. Dati di dimensione (Ref: 3) e Dati Tecnici (Ref: 4) sono specifici del codice indicato (Ref: 6).

Afinox s.r.l. via Venezia 4 - 35010 - Campo San Martino - Padova (PD) - ITALY - Tel. +39 0499638311 / e-mail: comm@afinox.com / web: www.afinox.com

Ref: 6 Code/Codice 7SF74IP2VA002

Pag. 1 / 3

Rev.: 02 / 2019

Dimensional Data/Dati di dimensione:

Ref: 3

External dimensions (mm) WxDxH <i>Dimensioni Esterne (mm) LxPxH</i>	2452x700x850	Insulation Thickness (mm) <i>Spessore di isolamento (mm)</i>	50
Internal Dimensions (mm) WxDxH <i>Dimensioni interne (mm) LxPxH</i>	426x600x558 x4	Internal Volume (l) <i>Volume Interno (l)</i>	454
Packing Dimensions (mm) WxDxH <i>Dimensioni Imballo (mm) LxPxH</i>	2485x760x1020	Gross Weight (Kg) <i>Peso Lordo (Kg)</i>	152
		Net Weight (Kg) <i>Peso Netto (Kg)</i>	134

Technical Data/Dati Tecnici:

Ref: 4

Power supply (V/Ph/Hz) <i>Alimentazione (V/P/Hz)</i>	230 / 1 / 50	Noise (db) 5m <i>Rumore (db) 5m</i>	42
Yearly Energy Consumption (kWh/annum) <i>Consumo energetico Annuo (kWh/annum)</i>	1894	Daily energy consumption (kWh/24h) <i>Consumo energetico 24H (kWh)</i>	5
Nominal power consumption (W) <i>Potenza assorbita (W)</i>	149**	Maximum absorbed current (A) <i>Massima corrente assorbita (A)</i>	4,04
Energy efficiency class <i>Classe Energetica</i>	D	Climatic Class <i>Classe Climatica</i>	4 (30°C - 55%)
Blast chilling yield (Kg) *** <i>Resa Abbattimento (Kg) ***</i>		Refrigerating power (W) <i>Potenza Frigorifera (W)</i>	303**
Shock freezing yield (Kg) *** <i>Resa Surgelazione (Kg) ***</i>		Gas	R290 - GWP 3 - Kg 0,07
Compressor/ <i>Compressore</i>		Controller	EV3B
DLE4CN			

* (-30/+45° C), **(-10/+45° C)

Hood/Sovrastruttura

*** The blast chilling & shock freezing yields, expressed in Kg or lb are indicative and not binding. The food cooling time depends on its composition and sizing. The actual cooling time for various food might be different from the indicated one.

*** Le rese in abbattimento e in surgelazione espresse in Kg o lb sono indicative e non vincolanti. Il tempo di raffreddamento degli alimenti dipende dalla loro composizione e dimensione. Il tempo di raffreddamento reale dei vari alimenti, potrebbe essere diverso da quello indicato.

All specifications are subject to change without notice. *Dati tecnici soggetti a modifiche senza preavviso.*

The Picture (Ref: 1), the description (Ref: 2) and the technical drawing (Ref: 5) refer to the product range. Dimensional Data (Ref: 3) and Technical Data (Ref: 4) refer to the specific code (Ref: 6).


L'immagine (Ref: 1), la descrizione (Ref: 2) e il disegno tecnico (Ref: 5) sono relativi alla famiglia prodotto. Dati di dimensione (Ref: 3) e Dati Tecnici (Ref: 4) sono specifici del codice indicato (Ref: 6).

Afinox s.r.l. via Venezia 4 - 35010 - Campo San Martino - Padova (PD) - ITALY - Tel. +39 0499638311 / e-mail: comm@afinox.com / web: www.afinox.com

Ref: 6 Code/Codice 7SF74IP2VA002






Pag. 2 / 3

Rev.: 02 / 2019

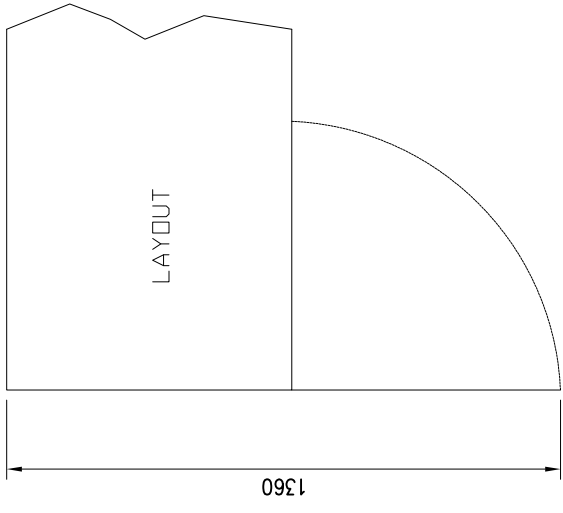

DOORS
 2
 3
 4

L1
 1400
 1926
 2452

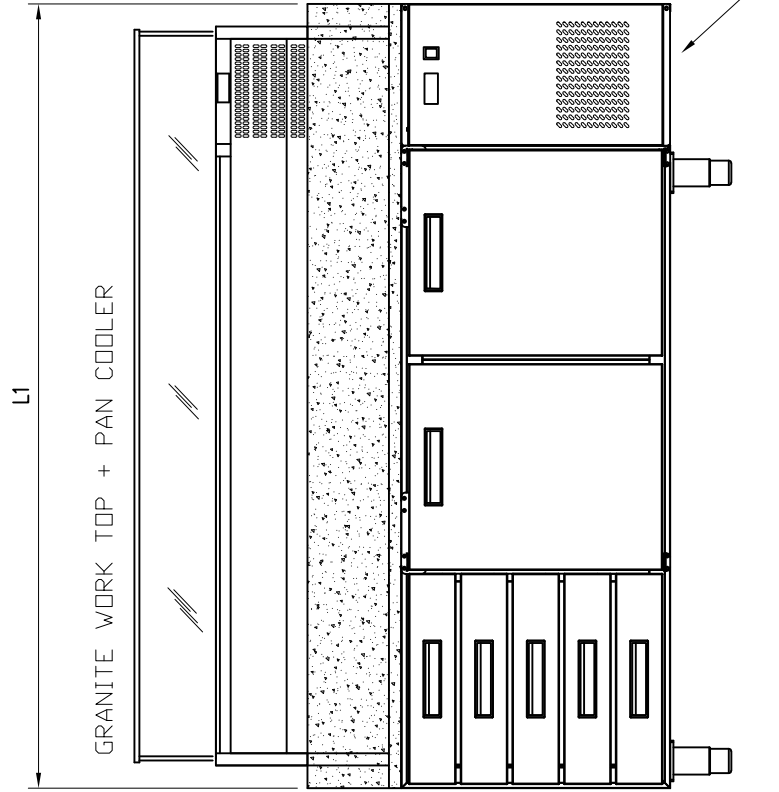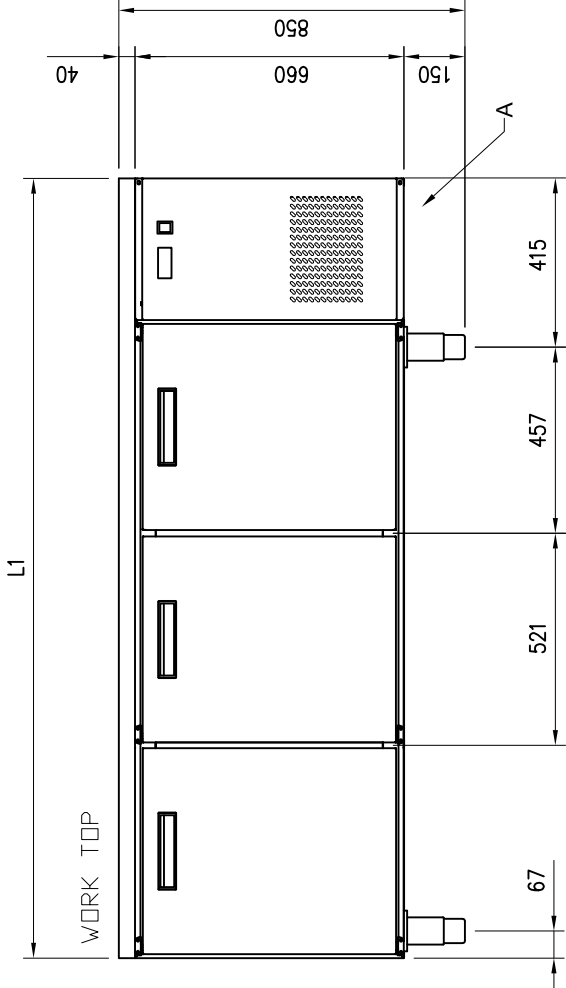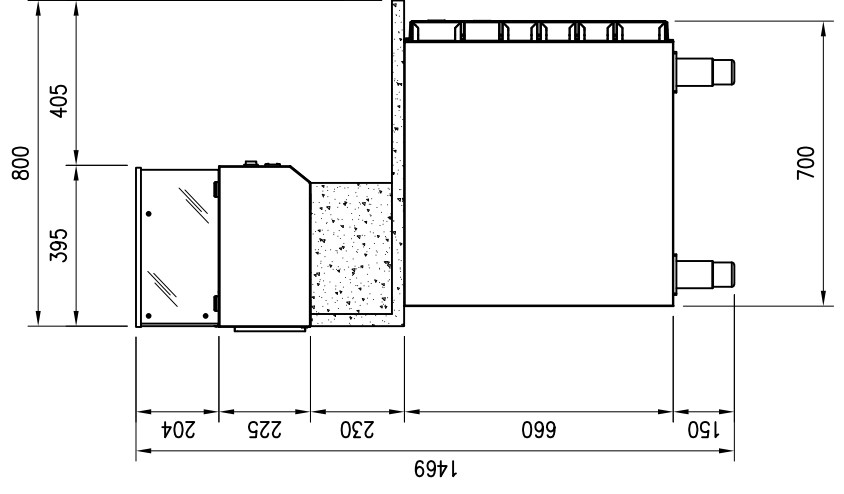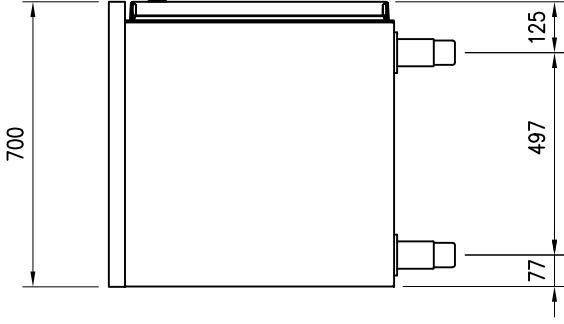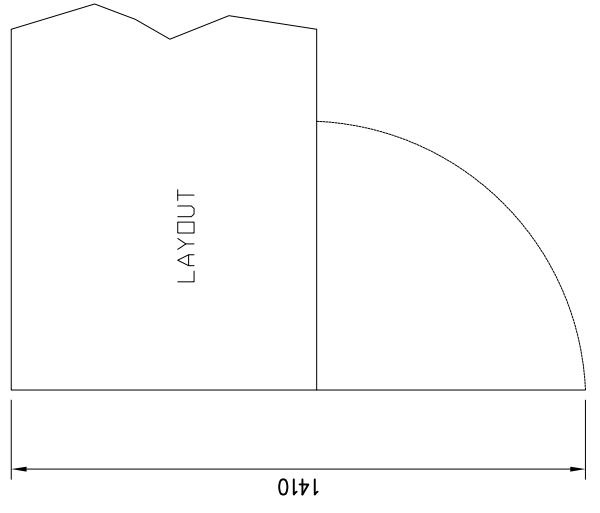

A= ELECTRICAL CONNECTION